




ZirChrom®


Technical
Bulletin #309

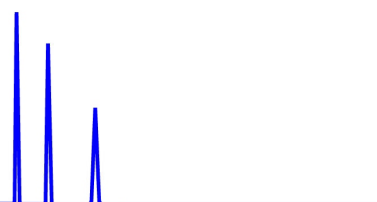

... For Peak Performance

High pH Stability of Sachtopore-RP

pH 12.0

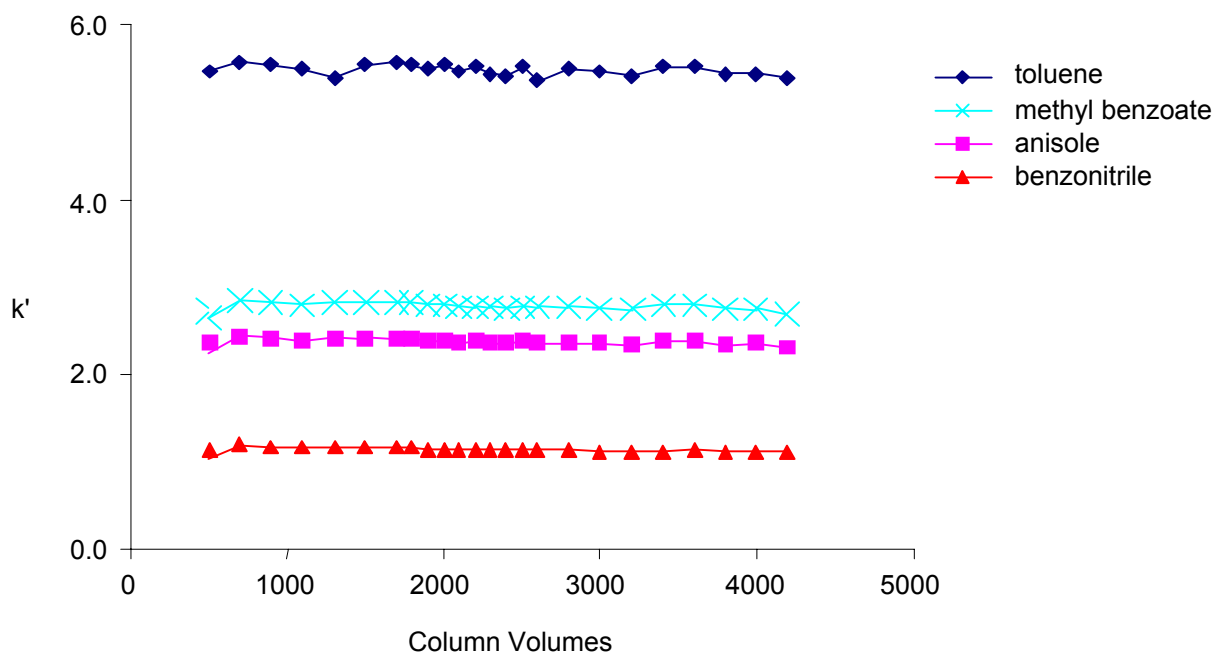

LC Conditions

Column: Sachtopore-RP, 50 × 4.6 mm (3 μm, 300 Å)

Flow Rate: 1.0 mL/min.

Temperature: 30 °C

Mobile Phase:

Injection Volume: 5.0 μl

0.01M Tetramethylammoniumhydroxide, pH 12.0

Detection: 254 nm

