



Polymer and Carbon Coated Porous Titania for Reversed Phase and Preparative Liquid Chromatography

Eastern Analytical Symposium 2006

BINGWEN YAN¹, CLAYTON V. MCNEFF¹, JOCHEN WINKLER²

¹ZirChrom Separations, Inc. 617 Pierce St., Anoka, MN 55303,

²Sachtleben, Duisburg, Germany

*Specialists in High Efficiency, **Ultra-Stable** Phases for HPLC*




Outline

- Surface Chemistry of Titania
- Selectivity Comparison of Sachtopore-RP, Silica C18, ZirChrom-CARB, and ZirChrom-PBD
- Chemical and Thermal Stability Testing
- Effect of Lewis Base Mobile Phase Additive on Elution of Basic Compounds
- Applications


Conclusion - The titania phases show similar selectivity to their zirconia counterparts, and have excellent stability from pH 1-12 and up to 100 °C.




Surface Chemistry of Titania-Based Supports for HPLC

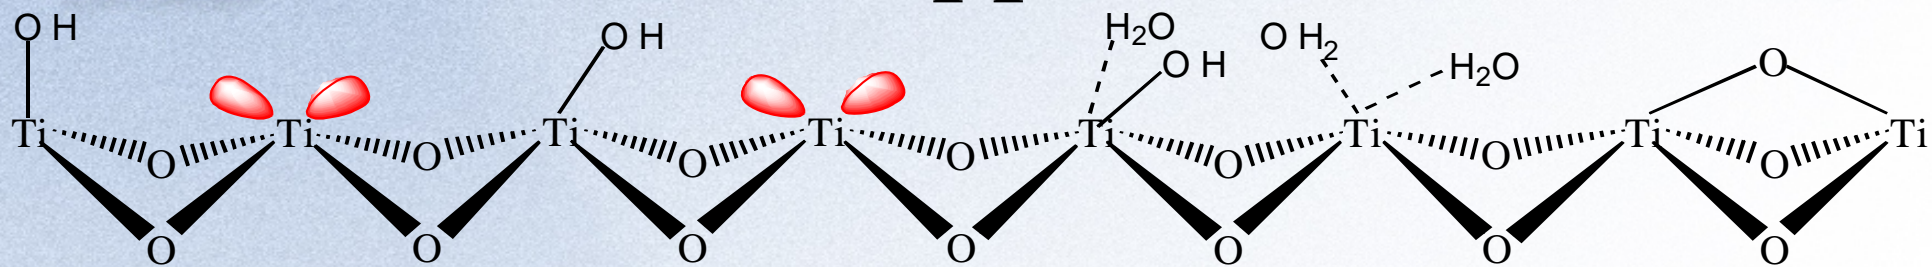


Weak Brönsted Acid:



Weak Brönsted Base:


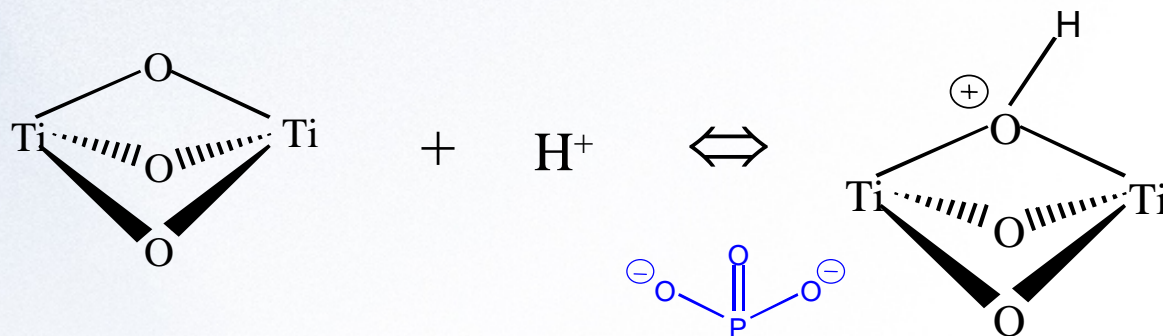


Strong Lewis Acid:

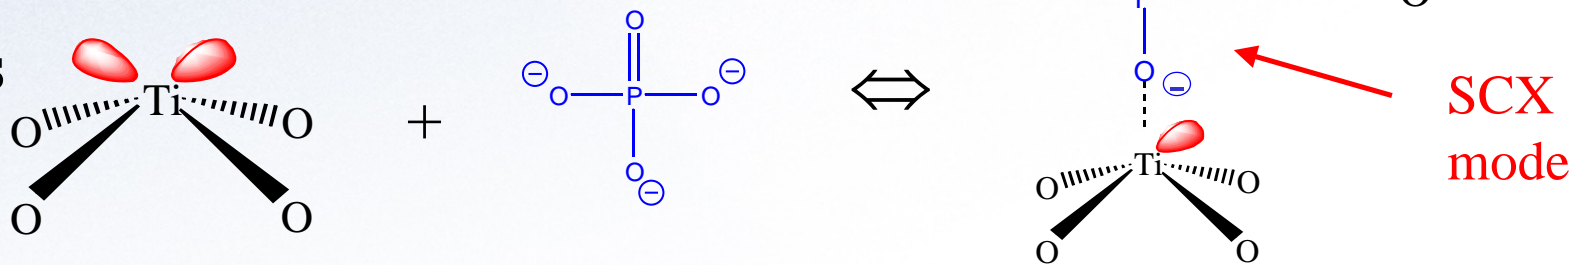




Polyethylene Coated Titania

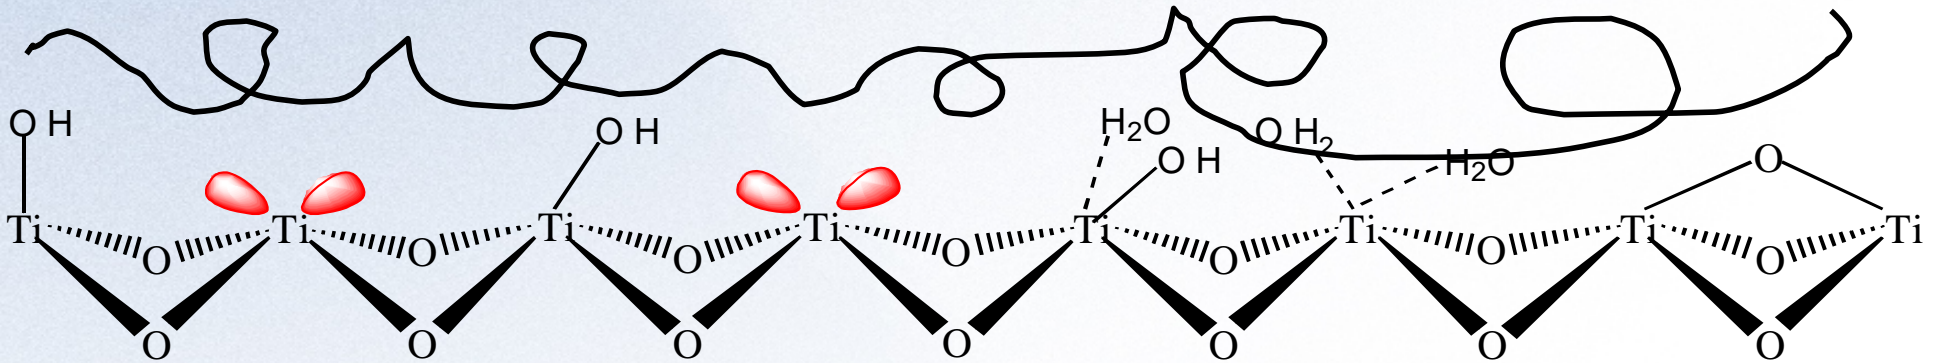




22 Non-electrolyte Solutes


Nonpolar




Benzene




Toluene




Ethylbenzene



p-xylene




Propylbenzene




Butylbenzene


Polar




Bromobenzene




p-Dichlorobenzene




Anisole




Methylbenzoate




Naphthalene




Acetophenone




Benzonitrile




Nitrobenzene



p-Nitrotoluene




p-Nitrobenzyl Chloride




Benzophenone


HB Donor




Benzylalcohol




3-Phenyl Propanol



N-Benzyl Formamide




Phenol



p-Chlorophenol




Selectivity Comparison

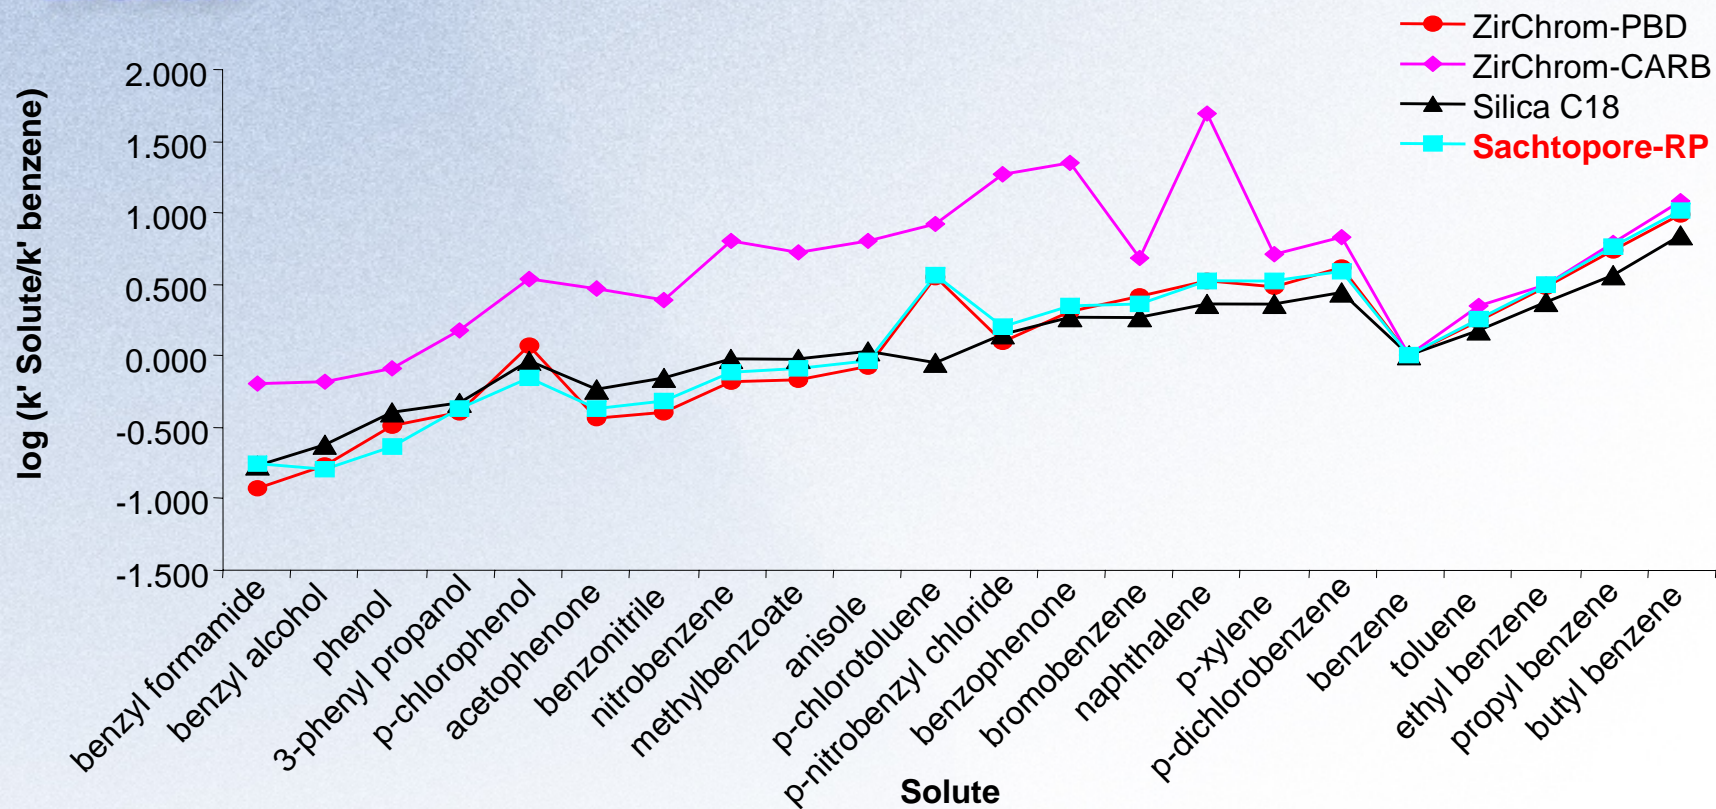

LC Conditions: Mobile phase, 40/60 ACN/Water; Flow rate, 1.0 ml/min.; Temperature, 30 °C; Injection volume, 5ul; Detection at 254nm.



K-K Comparison

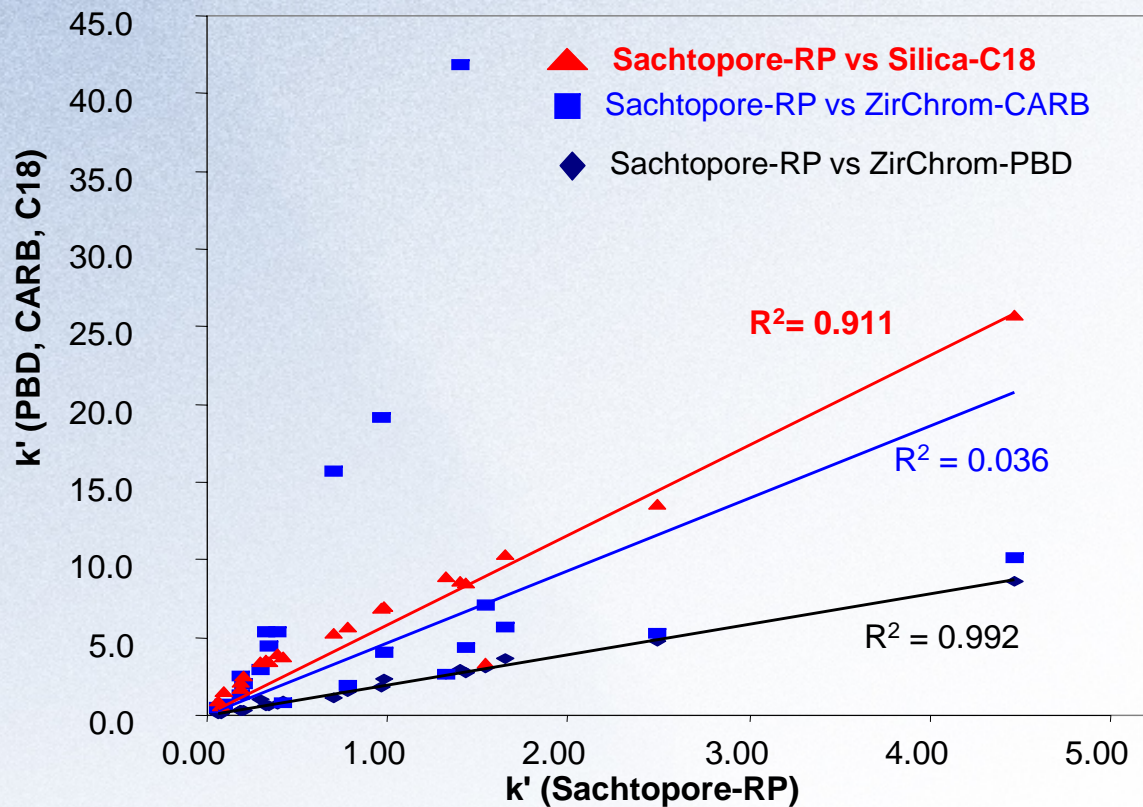


LC Conditions: Mobile phase, 40/60 ACN/Water; Flow rate, 1.0 ml/min.; Temperature, 30 °C; Injection volume, 5ul; Detection at 254nm.

Reference: Melander, W.; Stoveken, J.; Horvath, C. *J. Chromatogr.* **1980**, *199*, 35-56.




Chemical Stability

pH 1.0

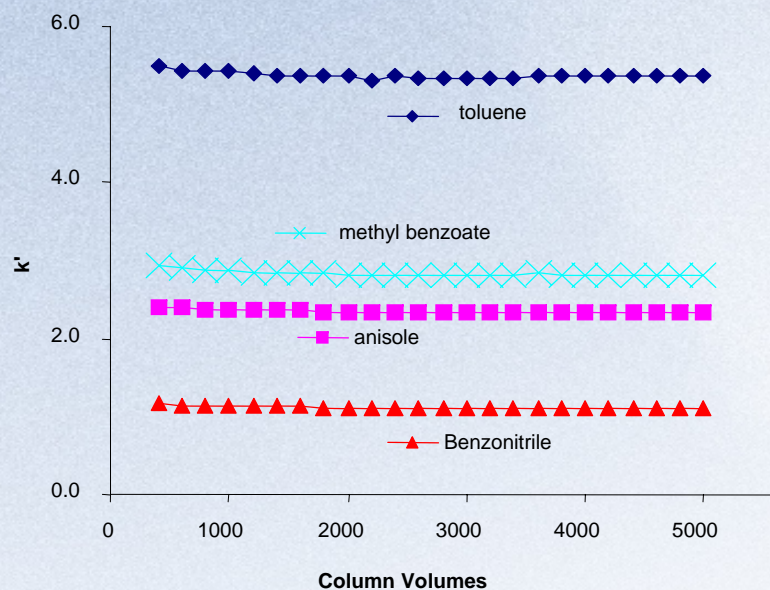


pH 12.0

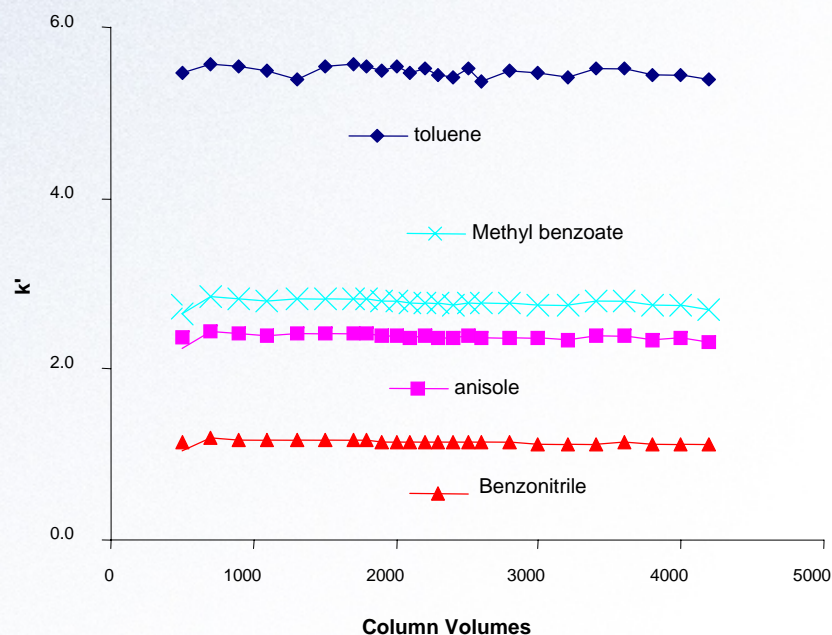

Exposure and Evaluation Conditions: Mobile phase, 15/85 ACN/0.1M Nitric acid, pH 1.0, or 0.01M Tetramethylammoniumhydroxide, pH 12.0; Flow rate, 1.0 ml/min.; Temperature, 30 °C; Injection volume, 5 μ l; Detection at 254 nm; Column, 50 mm x 4.6 mm i.d., Sachtopore-RP (part# TI01-0546).




Temperature Stability at 100 °C

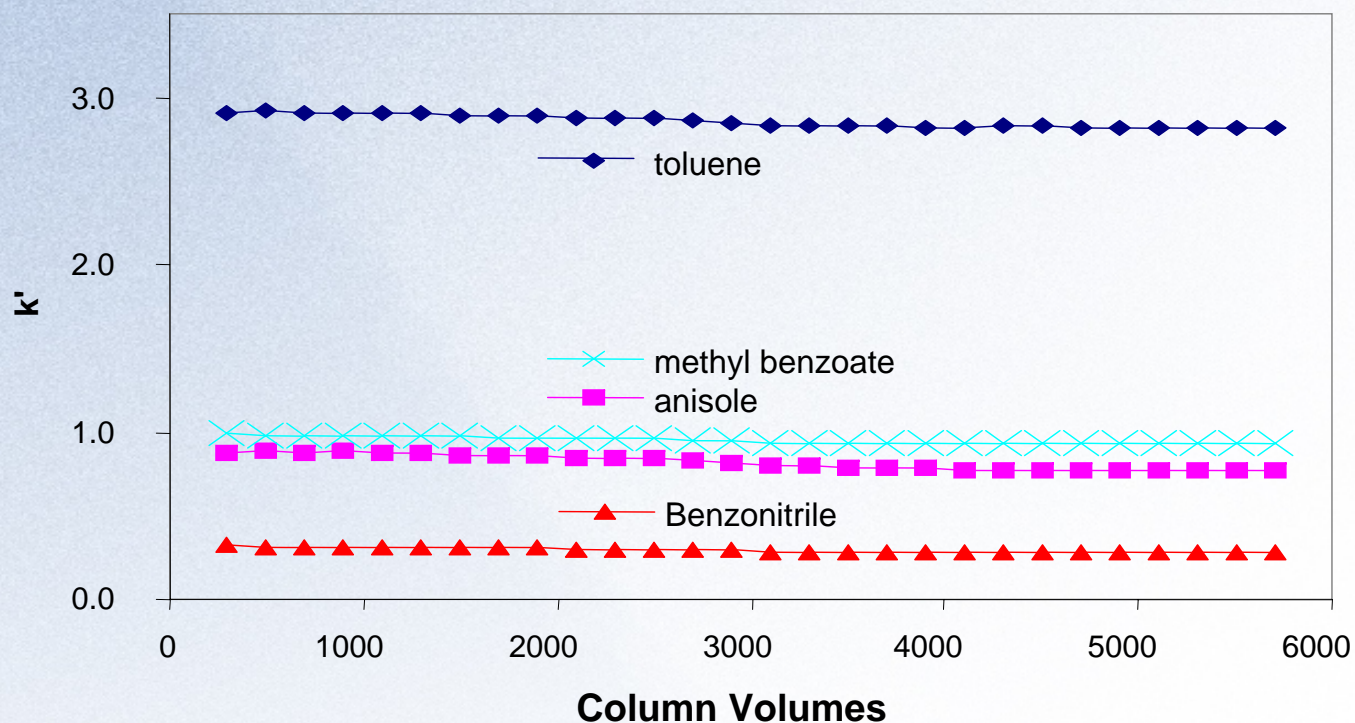

Exposure and Evaluation Conditions: Mobile phase, 15/85 ACN/water; Flow rate, 1.0 ml/min.; Temperature, 100 °C with Metalox heater; Injection volume, 5 ml; Detection at 254 nm; Column, 50 mm x 4.6 mm i.d., Sachtopore-RP (part# TI01-0546).




Effect of Lewis Base Additive on Separation of Basic Drugs

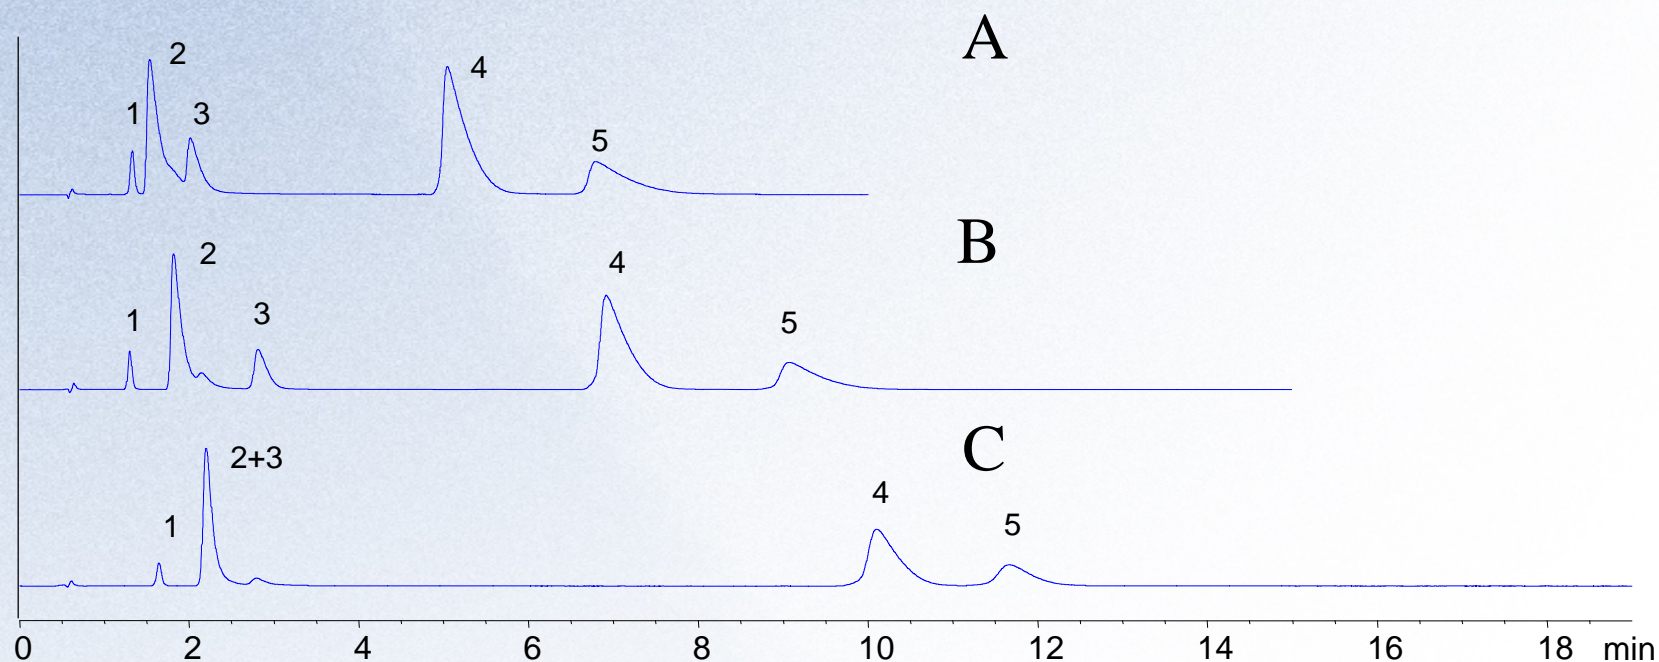

LC Conditions: Mobile phase: 30/70 ACN/20 mM buffer (pH=7). (A) ammonium acetate, (B) ammonium fluoride, (C) ammonium phosphate. flow rate: 1ml/min, temperature: 40 °C. Wavelength: 254 nm. Column, 50 mm x 4.6 mm i.d., Sachtopore-RP (part# TI01-0546). Solutes: (1) lidocaine, (2) quinidine, (3) tryptamine, (4) amitriptyline, and (5) nortriptyline.




Effect of Ionic Strength on Separation of Basic Drugs

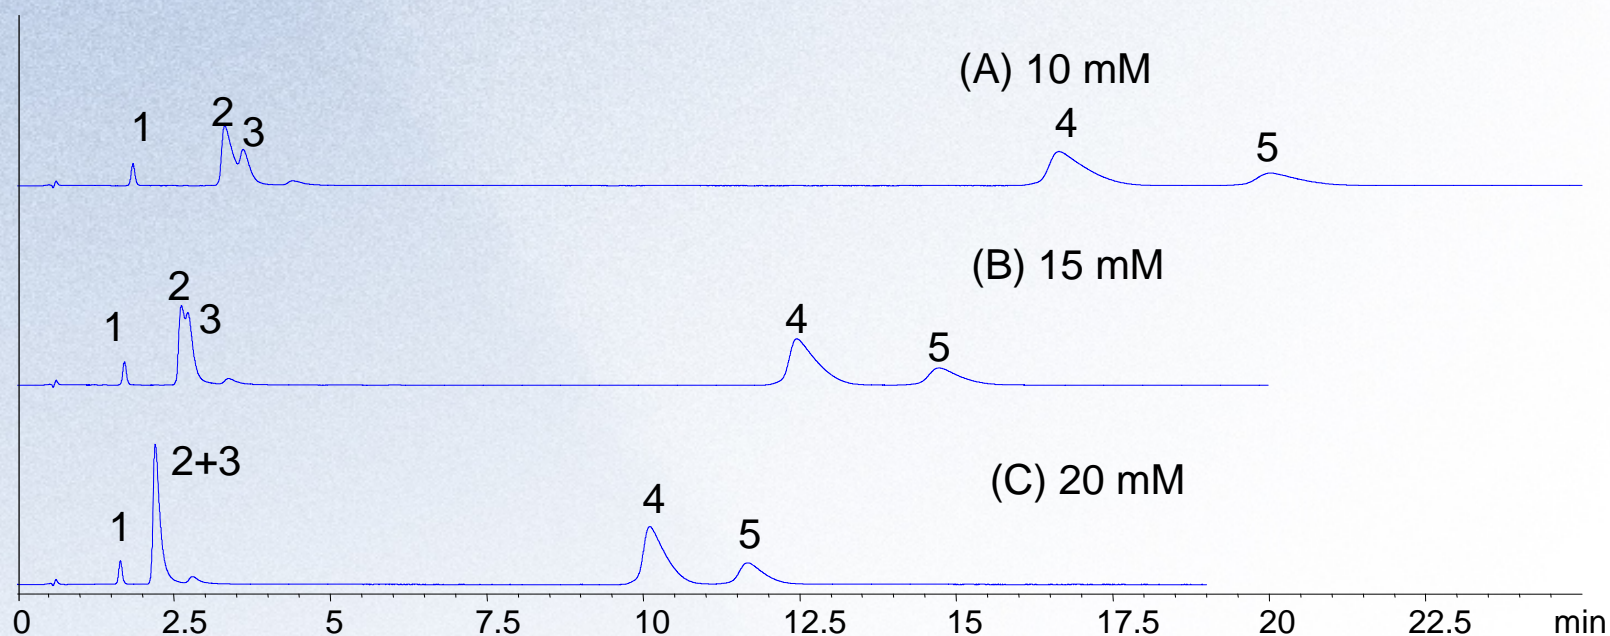

LC Conditions: Mobile phase: 30/70 ACN/phosphate buffer (pH=7). (A) 10 mM, (B) 15 mM, (C) 15 mM. flow rate: 1ml/min, temperature: 40 °C. Wavelength: 254 nm. Column, 50 mm x 4.6 mm i.d., Sachtopore-RP (part# TI01-0546). Solutes: (1) lidocaine, (2) quinidine, (3) tryptamine, (4) amitriptyline, and (5) nortriptyline.

Antihistimines Separation at pH 10

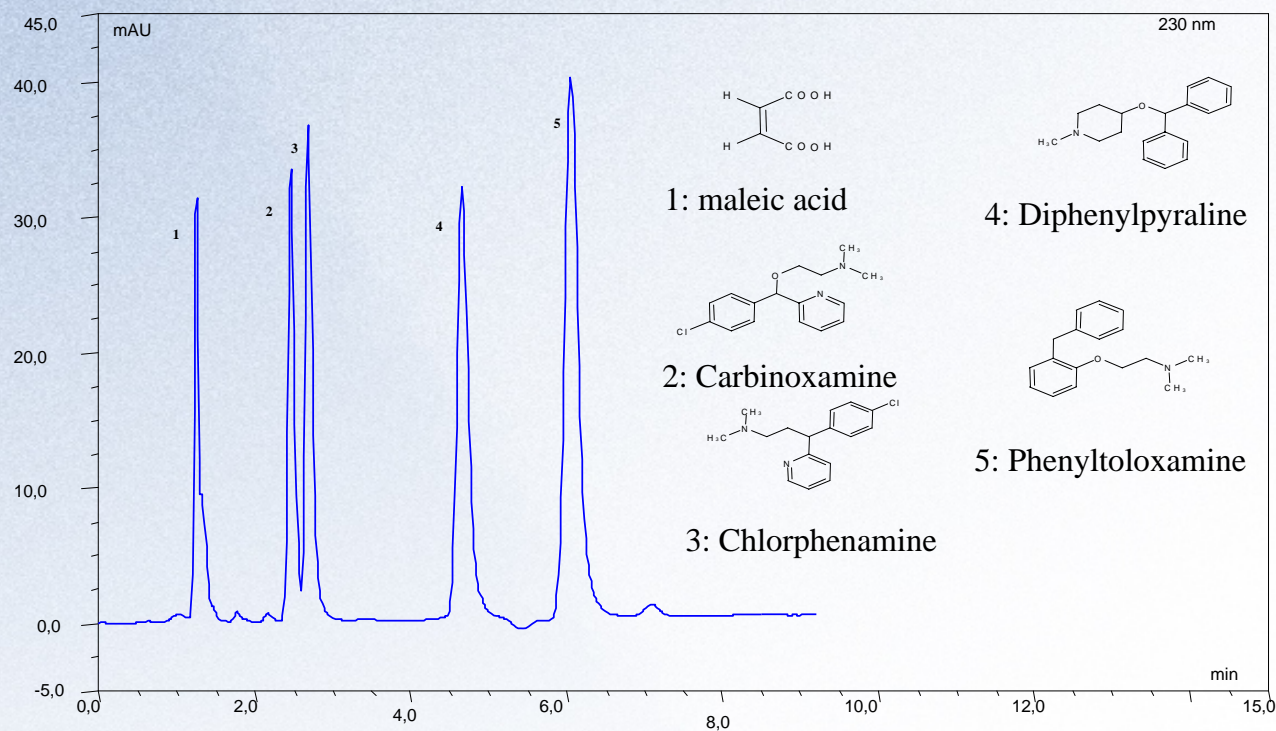

LC Conditions: Mobile phase, 74% (50 mM H₃PO₄ + 5 mM KH₂PO₄), 26% ACN, pH 10; Flow rate, 1.0 ml/min.; Temperature, Ambient; Injection volume, 20 µl; Detection at 220 nm; Column, Sachtapore-RP (300 Å, 3 µm, 150 x 4 mm).



Semi-Prep Separation of Pentifylline (vasodilator)

Particle Sizes:

3,5,10,20,40,80

100 micron


1 mm

Pores sizes:

60, 100, 300,

500, 1000,


2000 Angstroms

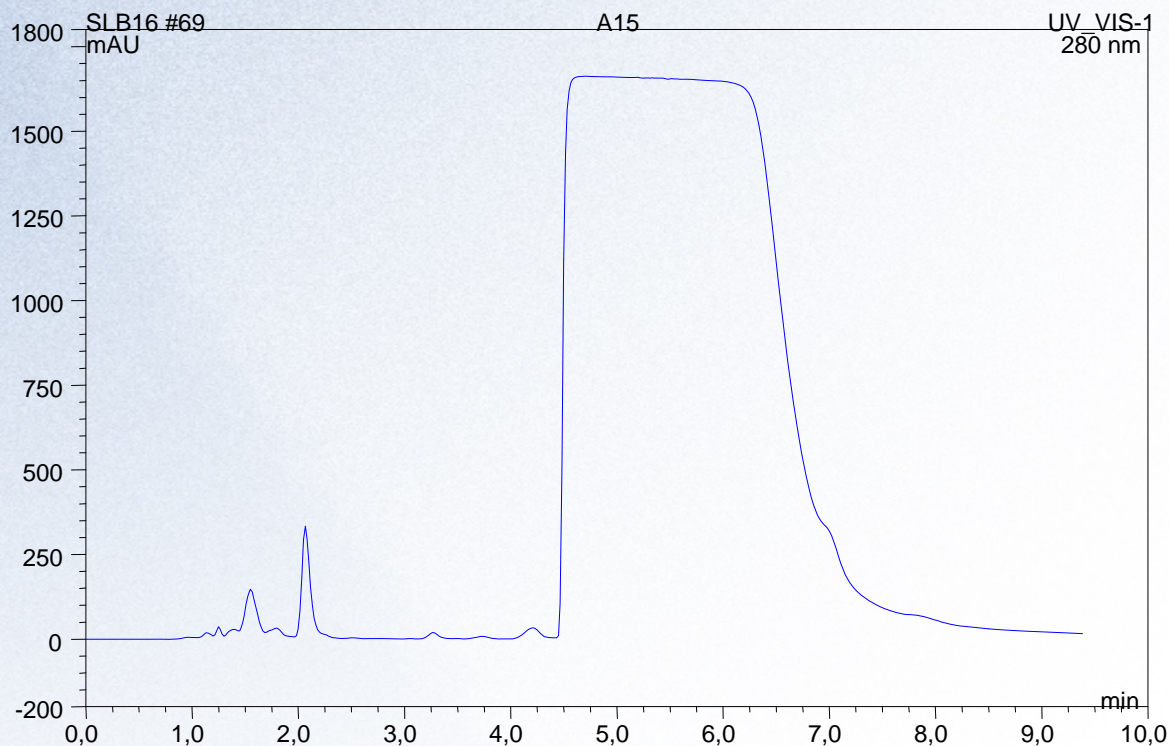

LC Conditions: Mobile phase, (+ 10 mM $\text{Na}_2\text{B}_4\text{O}_7$ + 1 mM H_3BO_3), pH 8.8; Flow rate, 1.0 ml/min.; Temperature, Ambient; Injection volume, 20 μl ; Detection at 254 nm; Column, Sachtapore[®]-RP (300 Å, 3 μm , 150 x 4 mm).



Comparison Between Sachtopore-CARB and ZirChrom-CARB

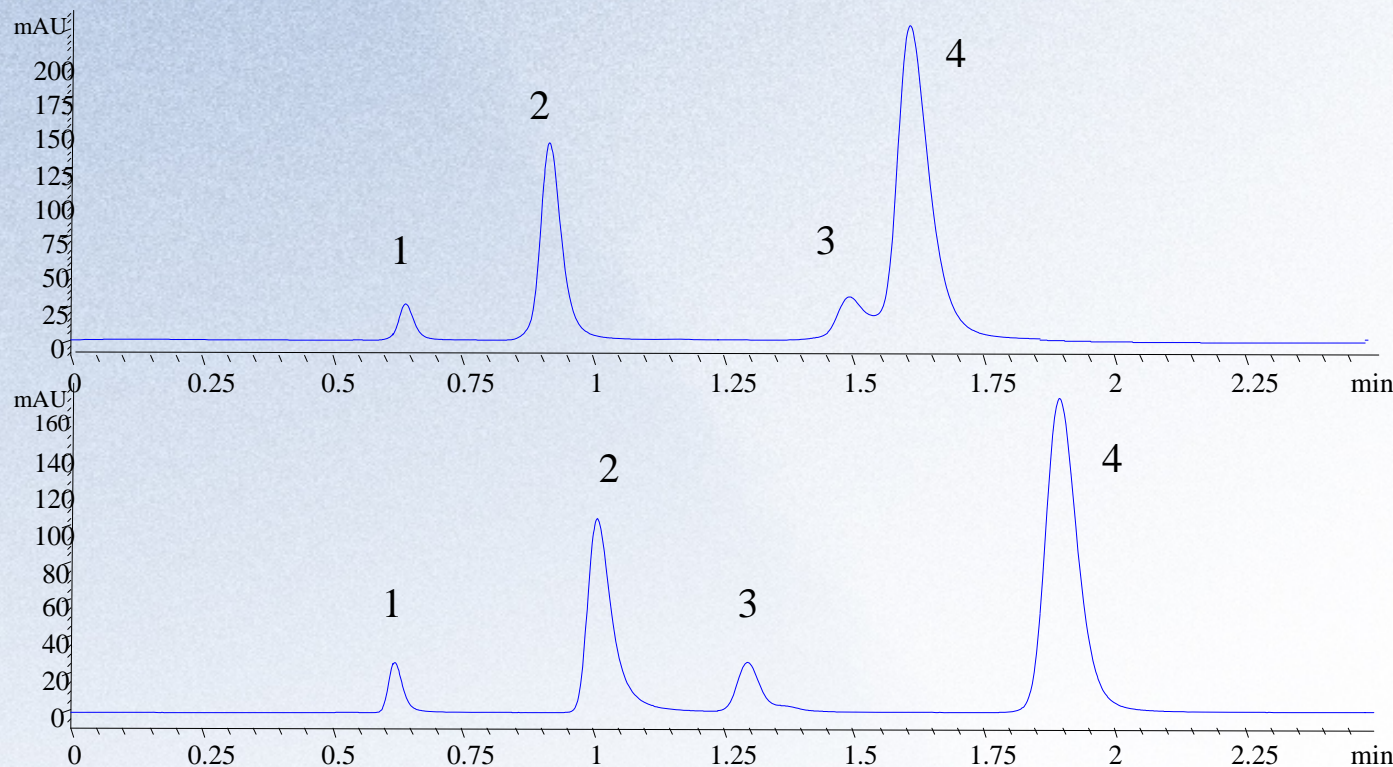

Sachtopore-CARB has somewhat similar selectivity compared to ZirChrom-CARB.

LC Conditions: Mobile phase, 50/50 ACN/water; Flow rate, 1.0 ml/min.; Temperature, Ambient; Injection volume, 5 μ l; Detection at 254 nm; Column: 50 x 4.6 mm, 5 μ m.
Solute: (1) acetone, (2) p-cresol, (3) ethylbenzene, (4) nitrobenzene



Conclusions

- The Sachtopore-RP shows *similar selectivity* to ZirChrom-PBD (ODS-like for neutrals).
- The Sachtopore-RP has *excellent stability* from pH 1-12 and up to 100°C.
- The type of Lewis base buffer has a profound effect on *selectivity* for Sachtopore-RP.
- Basic (amine) analytes generally undergo *RP/CEX mixed-mode retention mechanism* on Sachtopore-RP.
- Sachtopore-CARB has *somewhat similar* selectivity compared to ZirChrom-CARB.



**For More Information,
Visit Us at Booth 220**



For more information and web access to the free
Buffer Wizard: www.zirchrom.com